

Silicon NPN Power Transistors

2SC5386

DESCRIPTION

- With TO-3P(H)IS package
- High voltage;high speed
- Low collector saturation voltage

APPLICATIONS

- Horizontal deflection output for high resolution display,color TV
- High speed switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

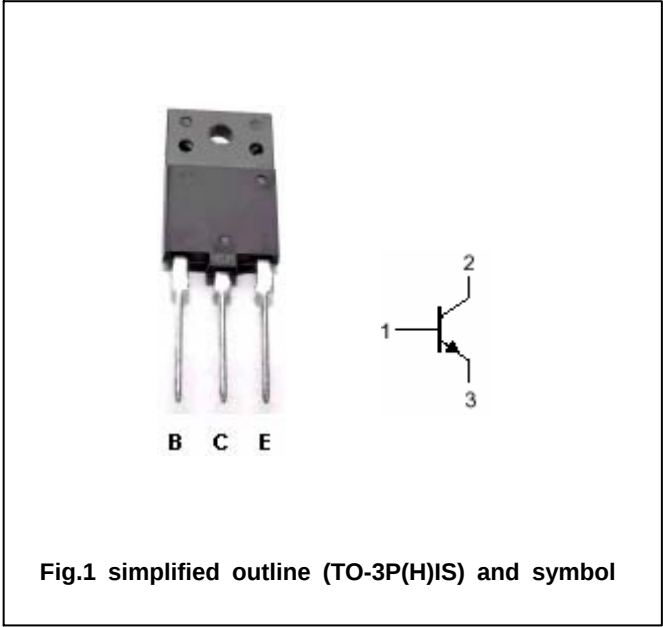


Fig.1 simplified outline (TO-3P(H)IS) and symbol

Absolute maximum ratings(Ta=25)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	1500	V
V _{CEO}	Collector-emitter voltage	Open base	600	V
V _{EBO}	Emitter-base voltage	Open collector	5	V
I _C	Collector current		8	A
I _{CM}	Collector current-Peak		16	A
I _B	Base current		4	A
P _C	Total power dissipation	T _C =25	50	W
T _j	Junction temperature		150	
T _{stg}	Storage temperature		-55~150	

Silicon NPN Power Transistors

2SC5386

CHARACTERISTICS

Tj=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=10mA$; $I_B=0$	600			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=6A$; $I_B=1.5A$			3.0	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=6A$; $I_B=1.5A$			1.5	V
I_{CBO}	Collector cut-off current	$V_{CB}=1500V$; $I_E=0$			1.0	mA
I_{EBO}	Emitter cut-off current	$V_{EB}=5V$; $I_C=0$			10	μA
h_{FE-1}	DC current gain	$I_C=1A$; $V_{CE}=5V$	15		35	
h_{FE-2}	DC current gain	$I_C=6A$; $V_{CE}=5V$	4.3		7.5	
C_{ob}	Collector output capacitance	$I_E=0$; $V_{CB}=10V$, $f=1MHz$		105		pF
f_T	Transition frequency	$I_E=0.1A$; $V_{CE}=10V$		1.7		MHz


Switching times

t_s	Storage time	$I_{CP}=5A$; $I_{B1(end)}=1.0A$ $f_H=64kHz$		2.5	3.5	μs
t_f	Fall time			0.15	0.3	μs

Silicon NPN Power Transistors

2SC5386

PACKAGE OUTLINE

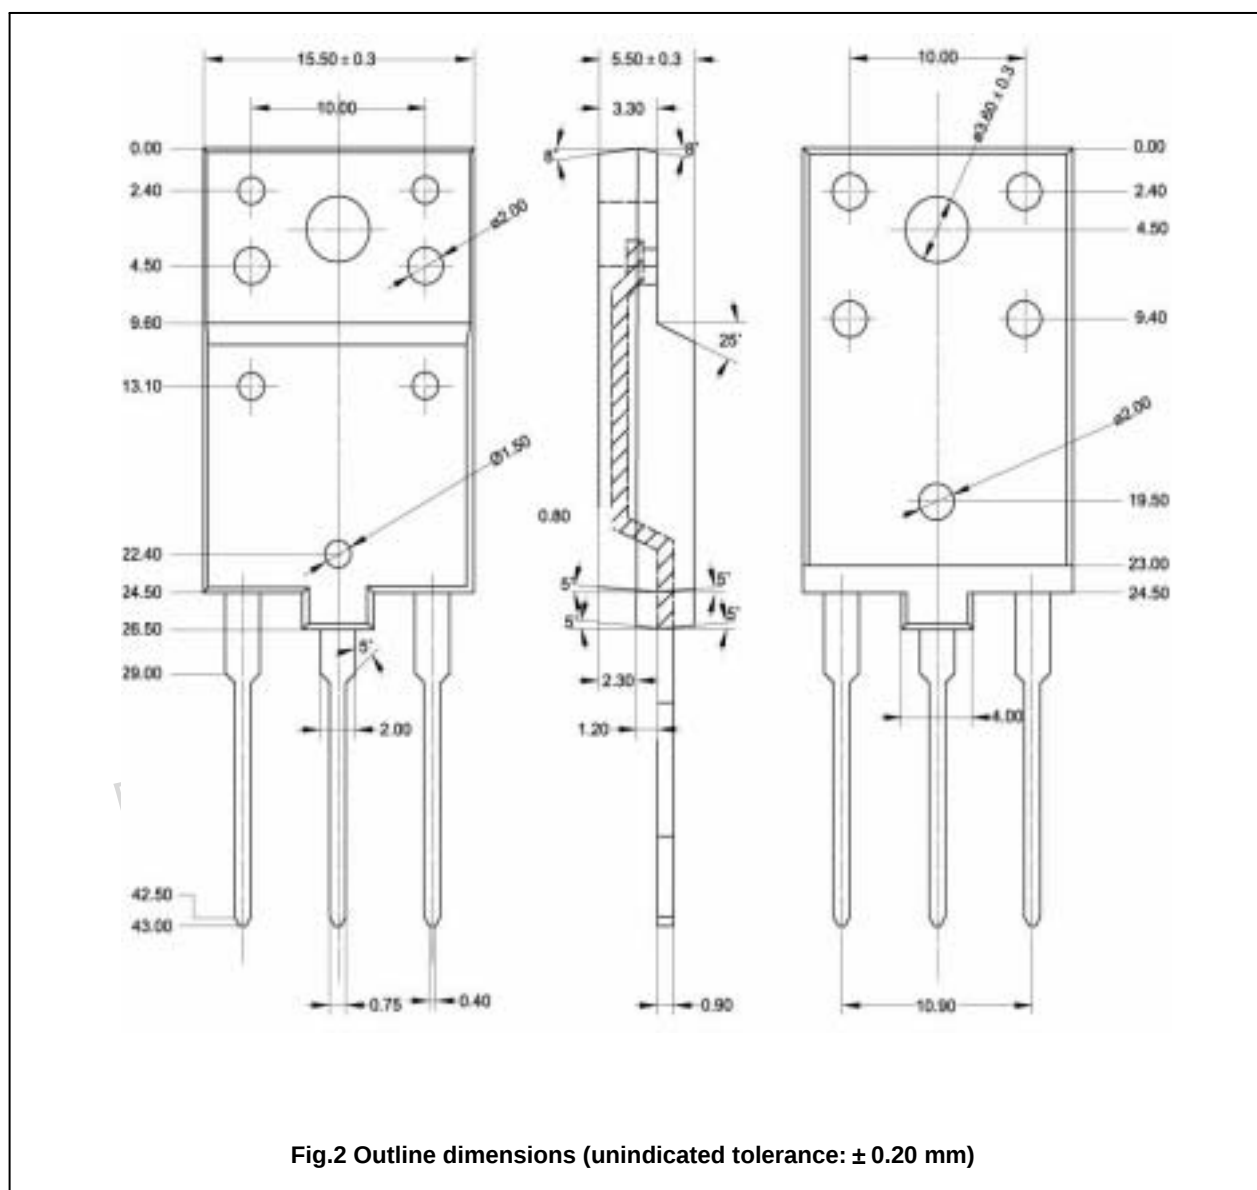

Silicon NPN Power Transistors

2SC5386

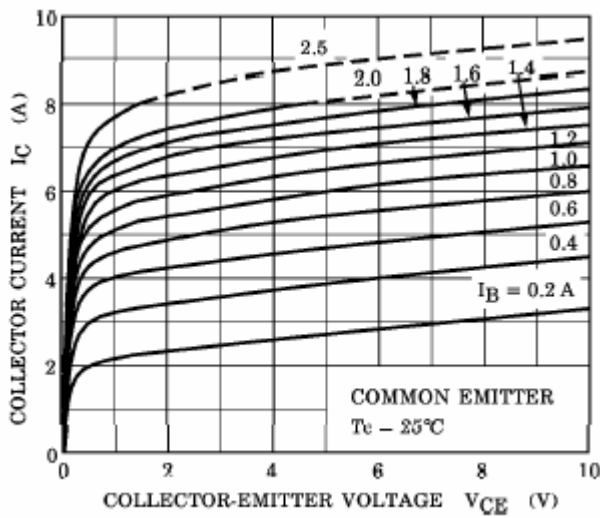


Fig.3 Static Characteristic

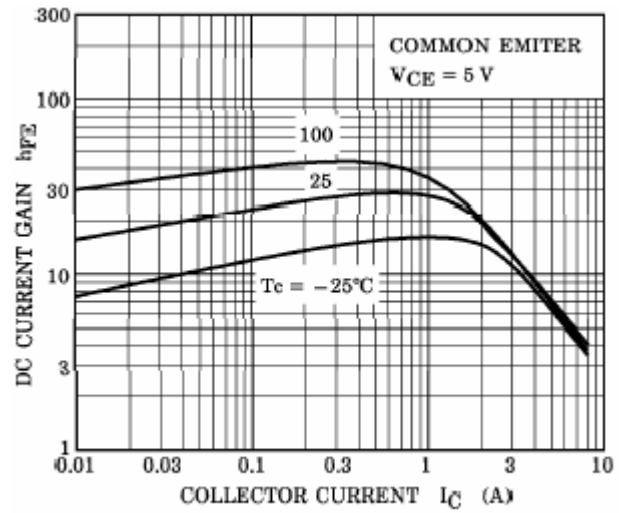


Fig.4 DC current Gain

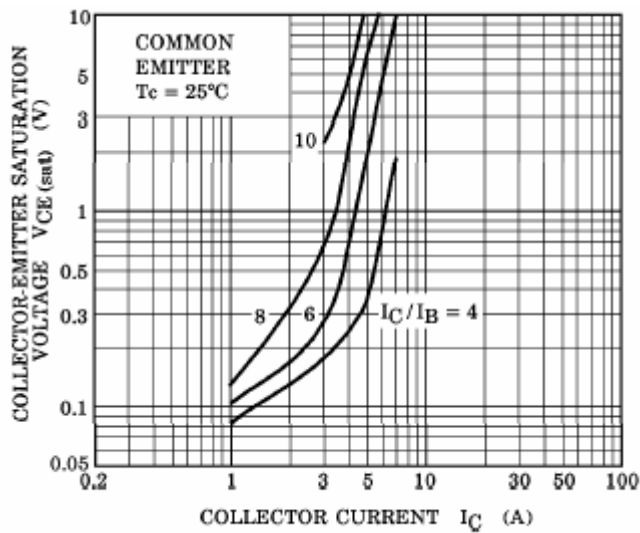


Fig.5 Collector-Emitter Saturation Voltage

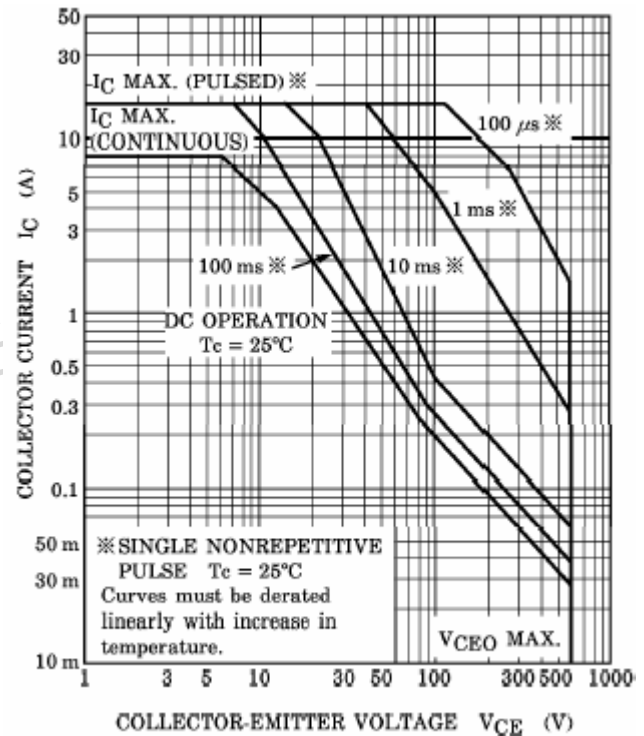


Fig.6 Safe Operating Area